


Breezy Blue® Response Specifications

The Breezy Blue® Smart Fogger is a cost-effective, self-contained, portable disinfection system that makes regular disinfection a breeze. Its high efficacy fogging system streamlines the workflow for users with simple and easy-to-use controls.

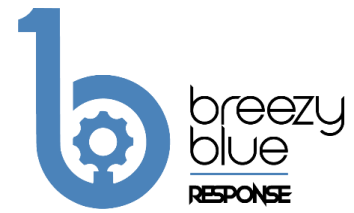

Breezy Blue® rapidly disinfects hospital operating rooms, patient rooms, restrooms, EMT vehicles and other similar spaces. Operators are kept out of harm's way and can deeply disinfect spaces with the touch of a Breezy Smart Controller button. In addition, Breezy Blue® maintains a historical record to assure everyone that your space has been thoroughly and properly disinfected. Compatible with aerosolized hydrogen peroxide (aHP) disinfectants, Breezy Blue® **ELIMINATES DANGEROUS PATHOGENS AND ODORS** without exposing users to irritating fog or contaminated spaces.

Breezy Blue® is ideal for seamlessly adding daily disinfection and deodorization of rooms and other spaces and vehicles where best practices include regular disinfection.

Item	Specification
SKU	BBR01
Approved BWR Solutions	Breezy BioPure RTU™, Breezy Halospray™, and Breezy BioCare RTU™
Disinfection Time	60 seconds fogging (typical 2400 ft ³ patient room)
Settling Time	10 minutes (see solution instructions)
Tank Capacity	1.25 gallons (4.7 L) – approximately 20 typical patient rooms or 48,000 ft ³
Flow Rate	About 3.6 gallons (13.6 L) per hour
Fogger	Atomizing cold fogger, micron sized particles
Connectivity	Bluetooth® Low Energy v5.2
Remote Controller (within 100 ft.)	Breezy wireless smart controller (BB02-WC, sold separately)
Remote configuration	Status, Fogging Duration, Scheduling, Button Mode, Fluid Level, Name
Visual Indicators	Idle, Fog Countdown, Fogging, Fog Settling, Disabled
Audible Indicator	Fog Countdown
User Controls (via push button)	Delayed Turn-On (when push button mode enabled) and Immediate Off
AC Power	110-120VAC / 50-60 Hz, 9.0A (while fogging)
Size & Weight	Diameter - 12.5 in (31.8 cm), Height - 16.5 in (41.9 cm), Weight (full) - 24 lbs (10.9 kg)
Operating Conditions	41 to 104° F (5 to 40 °C), ≤ 80% RH at 88° F (31 °C)
Storage Conditions	41 to 140° F (5 to 60 °C), ≤ 80% RH at 88° F (31 °C)
Portability	Handle for carrying and cord wrap